


RYCO FILTERS



FITTING INSTRUCTIONS FOR RYCO CABIN FILTER RCA212P. JEEP CHEROKEE (KK) & DODGE NITRO

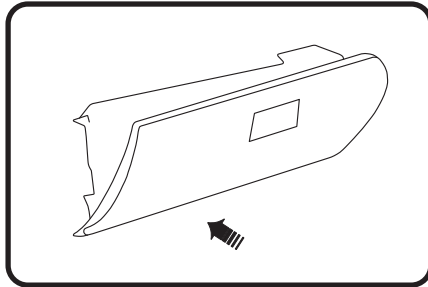

1. The cabin air filter is located behind the glove box compartment, it will have to be removed to gain access to the cabin air filter. This vehicle requires two filters - Ryco supply these together in one box.
2. Open the glove box and press inwards on both top corners so that the retaining lugs can be bypassed then let the compartment drop completely, unhinge and remove.
3. Identify the cabin air filter housing and unclip the lid.
4. Grab and slide out the first old cabin air filter carefully to avoid any accumulated debris from being spread around. Grab the second filter and do the same procedure as with the first. Clean the area and insert the new filters making sure they face in the right air flow direction. Refit all components in reverse order.

GUD Automotive Pty Ltd
29 Taras Ave Altona North
Victoria 3025 Australia.
www.rycofilters.com.au

GUD Automotive -
A division of GUD (NZ) Holdings Limited
626A Rosebank Road Avondale
Auckland, New Zealand
www.ryco.co.nz